

The GHB11 Benefits

- / Frequency inverter in hoisting and trolley motions (standard)
- / Load limit device with monitoring (standard)
- / Adjustable trolley with no component modifications required
- / All gears enclosed (including trolley drive gears)
- / Radio transmitter with weight read out (optional)
- / Tension roller, no counter weight
- / Trolley wheels driven on opposite flanges
- / ULCSA/IEC controls



GH Cranes is a leading manufacturer of material handling solutions that can be designed and adapted to be used in a wide range of industries around the world. Since 1958, we have designed, manufactured and installed products in over 70 countries

GH CRANES & COMPONENTS USA
Manufacturing & Service

14891 Hwy 205 Terrell
TX 75160 (USA)

T. 972.563.8333
ghcranesusa@ghcranes.com



Load control




All inverter



Remote control

Select the Right Hoist flip sheet for details → → →


www.usa.ghcranes.com

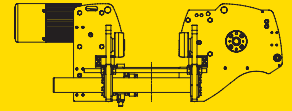

STANDARD MODELS

CAP.	MODEL	SPEED FALLS		FEM	HOL (F)			
		FPM		DUTY	H1	H2	H3	H4
1	GHB11-011116--M6	52,5	1/1	M6	47,6	88,9	122	155,2
1	GHB11-012216--M6	52,5	2/2	M6		33,8	50,5	67,2
1	GHB11-011120--M6	65,6	1/1	M6	47,6	88,9	122	155,2
1	GHB11-012220--M6	65,6	2/2	M6		33,8	50,5	67,2
1.6	GHB11-012216--M5	52,5	2/2	M5		33,8	50,5	67,2
1.6	GBH11-011116--M5	52,5	1/1	M5	47,6	88,9	122	155,2
2	GHB11-022108--M6	26,2	2/1	M6	23,8	44,3	61	77,4
2	GHB11-024208--M6	26,2	4/2	M6		16,4	24,6	32,8
2	GHB11-022110--M6	32,8	2/1	M6	23,8	44,3	61	77,4
2	GHB11-024210--M6	32,8	4/2	M6		16,4	24,6	32,8

CAP.	MODEL	SPEED FALLS		FEM	HOL (F)			
		FPM		DUTY	H1	H2	H3	H4
2.5	GHB11-022108--M6	26,2	2/1	M6	23,8	44,3	61	77,4
2.5	GHB11-024208--M6	26,2	4/2	M6		16,4	24,6	32,8
2.5	GHB11-022110--M5	32,8	2/1	M5	23,8	44,3	61	77,4
2.5	GHB11-024210--M5	32,8	4/2	M5		16,4	24,6	32,8
3.2	GHB11-034105--M6	16,4	4/1	M6	11,8	22,3		32,8
3.2	GHB11-032108--M5	26,2	2/1	M5	23,8	44,3	61	77,4
3.2	GHB11-034208--M5	26,2	4/2	M5		16,4	24,6	32,8
3.2	GHB11-034208--M6	26,2	4/2	M6		16,4	24,6	32,8
4	GHB11-044104--M6	13,1	4/1	M6	11,8	22,3		32,8
4	GHB11-044105--M6	16,4	4/1	M6	11,8	22,3		32,8
5	GHB11-054104--M6	13,1	4/1	M6	11,8	22,3		32,8
5	GHB11-054105--M5	16,4	4/1	M5	11,8	22,3		32,8
6.3	GHB11-064104--M5	13,1	4/1	M5	11,8	22,3		32,8

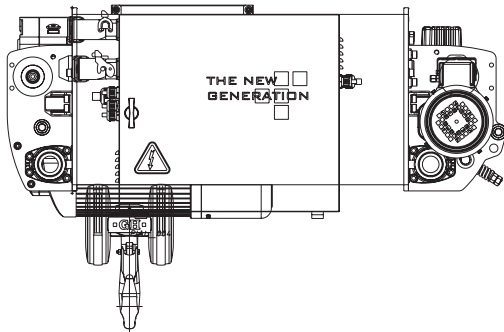

STANDARD FREQUENCY INVERTER IN HOISTING MOTION

4/1 FALLS

Nominal Speed with full load	13,1	FPM
Speed when load is <= 25%	21	FPM

2/1 FALLS & 4/2 FALLS

Nominal Speed with full load	26,2	FPM
Speed when load is <= 25%	42	FPM

1/1 FALLS & 2/2 FALLS

Nominal Speed with full load	52,5	FPM
Speed when load is <= 25%	84	FPM

OPTIONAL 2-SPEED MOTOR

4/1 Falls	13,1 / 2	FPM
2/1 Falls & 4/2 Falls	26,2 / 4	FPM
1/1 Falls & 2/2 Falls	52,5 / 7,9	FPM

WIDE SELECTION RANGE

